


FDB-4012-M

Metallic box for splicing and segregation of optic fiber with an index IP44. Its simple design facilitates installation and maintenance work.

For its characteristics It is suitable for use indoors and ICT2 facilities.

**Metallic indoor box for FO splicing and segregation.
4 input/output ports. 12 splices and 12 SC adapters.**

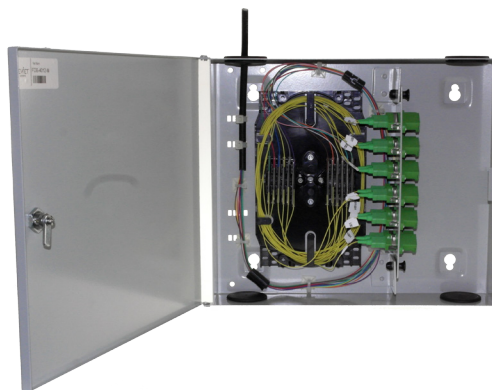

Technical specifications

Structural and mechanical characteristics	Material		Metallic
	IP		44
	Measures	Width	275 mm
		Height	225 mm
		Depth	60 mm
	Cover		Folding
	Locking System		Lock
	Weight		-
	Color		Grey
	Inputs/Outputs	Type	4 x 30 mm
		Fixing	Grommet
	Fusion splicing trays		Si
	Splices capacity		24
	Fiber routing guide		Integrated in tray
	Bend radius		50 mm
	Supported adapters	Capacity	12
		Types	SC simplex; LC duplex

Standards and certificates

RoHS
Compliant



Accessories	Cable fixing	4 ties + 4 adhesive guides
	Key	Set of 2
	Adapters	No included

Edition:2/ 2016

Features and specifications subject to change without notice.